



ACTUATOR 12T/120



The main purpose of the actuator is for produce force for closing and opening various types of valves and doors.

Hand operated hydraulic distributing valve is used for the controlling of the device. Version with solenoid valve is also available on the customer request.

Installation dimensions and configuration of the system are customized under customer request. Actuators with various characteristics are available on customer request.

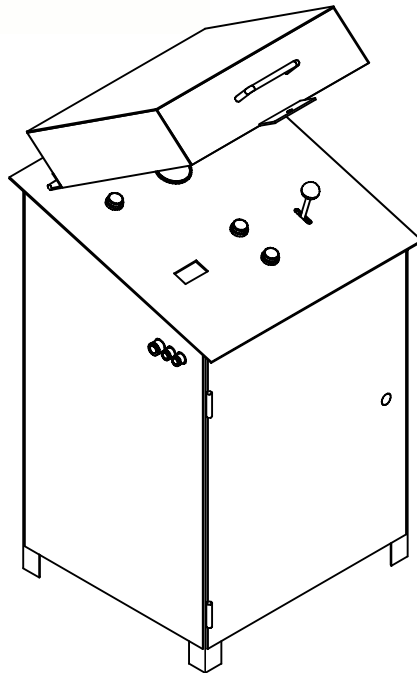

Ordering code	90 - 0120	90 - 0120/1	
Maximum operating pressure	100 bar	130 bar	
Mineral oil	HIDROL HD-46		
Working temperature	- 20 ; +50 ⁰ C		
Tank volume	20 dm ³		
Flow rate	6,3 dm ³ /min		
Cylinder stroke	500 mm		
Cylinder force for maximum pressure	7 800/6 200 daN	10 200/8 100 daN	
Electric motor	Power	1,1 kW	
	Voltage	380 V/50 Hz	
	speed	1410 rpm	1405 rpm
Mass	135 kg	140 kg	



SERBIA

36210 VRNJACKA BANJA

Rudjinci 175/A

tel/fax: +381 - 36 - 631 - 710
631 - 711

E-mail: office@fluidotehnic.com