


PNEUMATIC PUMP FOR LUBRICATION



Pneumatic pump for lubrication type is applied for centralized lubrication systems and for single lubrication in service work-shops as well as in industrial plants, where the supply of pressurized air is available. It is suitable for operation in very hard working conditions (excavators for surface exploitation, iron plants, cement works). This piston pump is designed to be directly mounted to a standard lubricant barrel of 200 dm³.

For uniform work operation of the pump pressurized air must be clean and lubricated. This is one of the warranty conditions.

The option with filter regulator-lubricator pneumatic set is also available (code 10-5000/P; 10-5050/P).

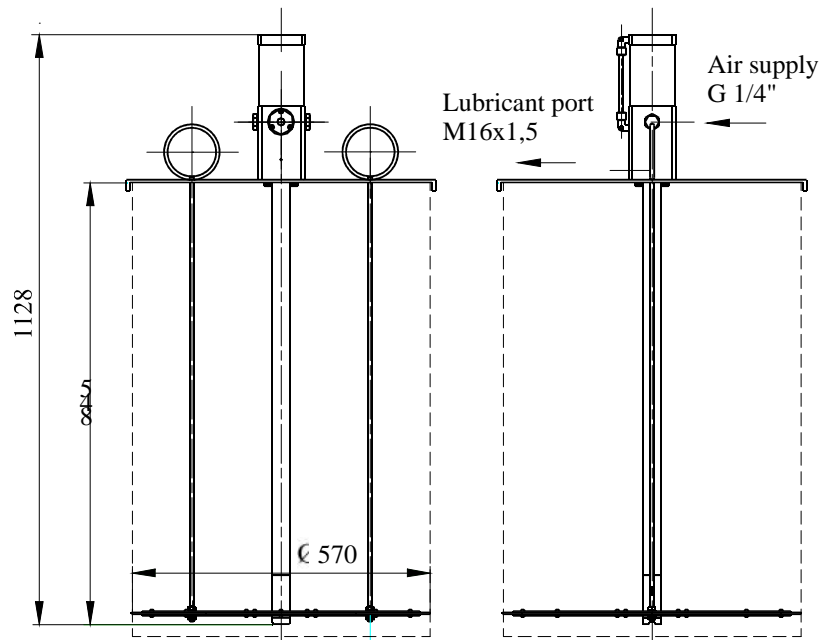

Ordering code	10 - 5000	10 - 5050	
Fluid	Oil viscosity	>13 mm ² /s	
	Grease	NLGI <3	
	Temperature	-10 ; +60 °C	
Air pressure	max. 6 bar		
Lubricant pressure	400 bar	150 bar	
Displacement	5,5 cm ³	14 cm ³	
Cycle per minute	120		
Mass	23 kg		

