


PNEUMATIC PUMP FOR OIL DRAFT





Pneumatic pump for oil draft is applied for oil draft for the barrels or tanks in service work-shops as well as in outdoor, where the supply of pressurized air is available. It is suitable for operation in very hard working conditions (excavators for surface exploitation, iron plants, cement works). This piston pump is designed to be directly mounted to the hole 2".

For uniform work of the pump, pressurized air must be clean and lubricated. This is one of the warranty conditions.

The option with filter regulator-lubricator pneumatic set is also available (code 10-5300/P).

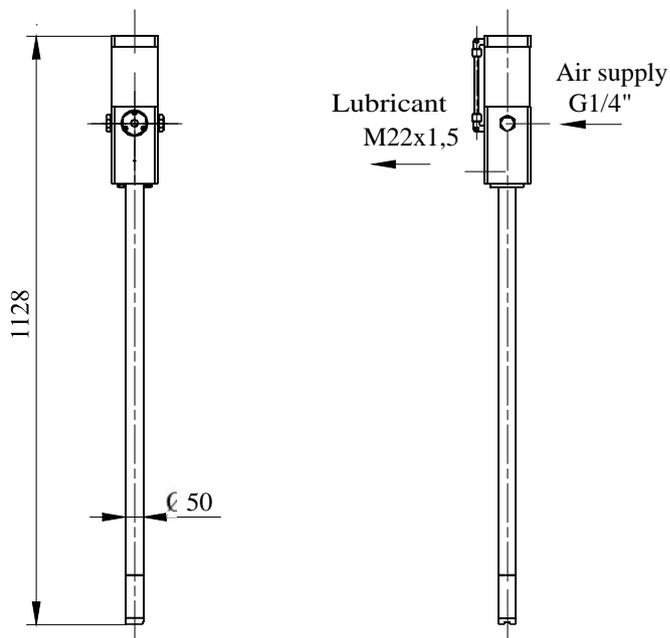

Ordering code	10 - 5300	
Fluid	Oil viscosity	>8 mm ² /s
	Temperature	-10 ; +60 °C
Air pressure	max. 6 bar	
Lubricant pressure	20 bar	
Displacement	65 cm ³	
Cycle per minute	160	
Mass	9 kg	

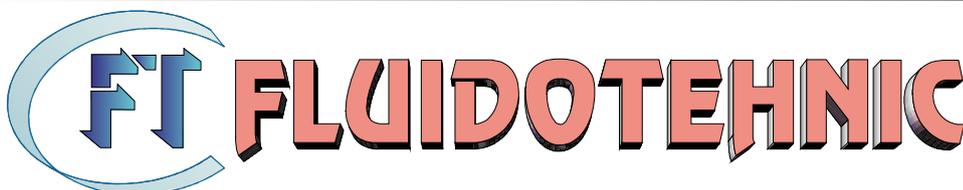

SERBIA
 36210 VRNJACKA BANJA
 Rudjinci 175/A
 tel/fax: +381 - 36 - 631 - 710
 631 - 711
 E-mail: office@fluidotehnic.com