


PRESSURE LINE FILTER (FOR OIL LUBRICATION SYSTEMS)


Pressure line filter is applied for oil circulating lubrication systems for middle and high power gearboxes. It is capable for operation in very hard conditions. The filter can be assembled in pressure line in any position. Flow direction is indicated by the arrow on the filter body. The filter cartridge is made of high strength wire cloth. Periodically it is necessary to clean the filter cartridge. To disassembling unscrew the filter cup (CH 24). The cleaning period depends of the operating time and of the oil purity.

The filters are made with cartridge's fineness of filtration: 40, 60, 100, 150, 200, 300 μm . In order code should be added required fineness.

EXAMPLE: Filter 10-0270/60

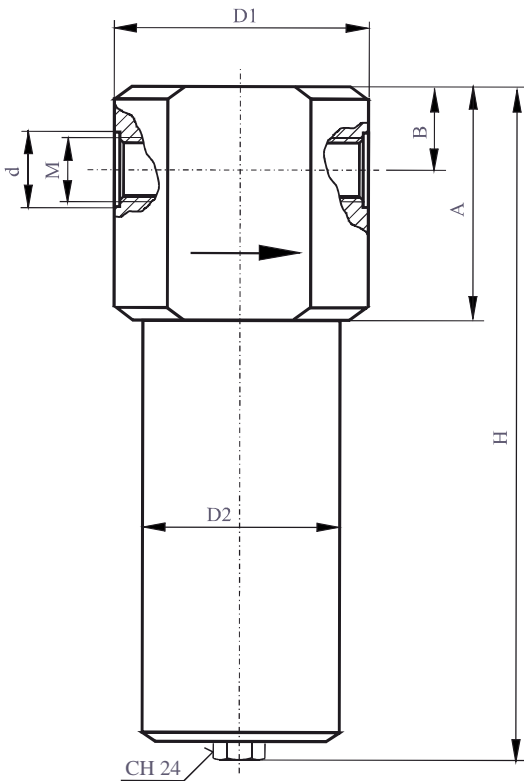

SYMBOL:



Ordering code	10-0265	10 - 0270	10 - 0275	10 - 0280	10 - 0285
Fluid	Oil viscosity >13 mm ² /s				
	Temperature -30 ; +80 °C				
Working pressure	20 bar				
Filtration rating	40, 60, 100, 150, 200, 300 μm				
Flow rate (dm ³ /min)	180	100	40	25	10
Mass (kg)	7,3	4,2	2,1	2,1	1

Code	M	d	D1	D2	H	A	B
10 - 0265	M42 x 2	50	120	105	390	95	25
10 - 0270	M33 x 2	40	110	90	280	80	25
10 - 0275	M27 x 2	34	100	76	205	58	18
10 - 0280	M22 x 1,5	28					
10 - 0285	M16 x 1,5	22	65	50	169	50	13



S E R B I A

36210 VRNJACKA BANJA
Rudjinci 175/A

tel/fax: +381 - 36 - 631 - 710
631 - 711

E-mail: office@fluidotehnic.com