


TWO - LINE DOSING DISTRIBUTORS




The dosing distributors are executive devices in two-line automatic and hand operated systems for centralized lubrication. Lubrication is carried out by injection of precisely defined quantity of lubricant under pressure. The quantity of lubricant is adjustable by regulation screw.

By unscrew the screw "X" and then montage plug screw in the one of the outputs, one gets a double quantity of lubricant in one lubrication point, and number of outlet ports is reduced. In this case type DD-2 becomes DD-1. Flow regulators bodies are protected by transparent protective caps against dust.

On customer request are manufactured dosing distributors with other dosing volume. As required, will be installed inductive sensors, in order to control a lubrication of certain points.

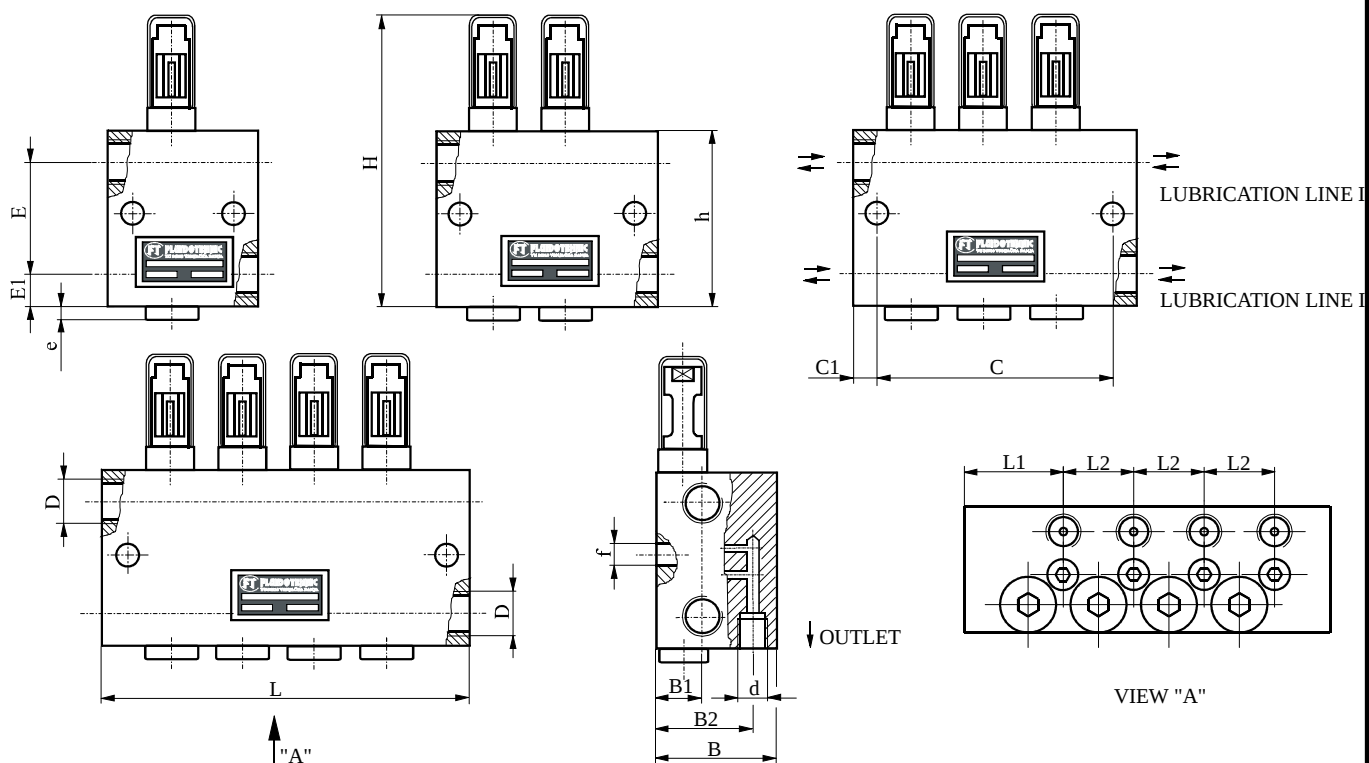

Size	Code	Number of lubrication points	D	d	L	L1	L2	B	B1	B2	H	h	C	C1	f	E	E1	e	Mass (kg)
2	10-1310	1	G 3/8"	G 1/4"	61	25	-	45	21	35	113	69	41	10	9	44	12,5	5	1,5
	10-1320	2			89		28						69						2,2
	10-1330	3			117								97						2,9
	10-1340	4			145								125						3,5
5	10-1410	1			68	30	-	51	27	41	131	80	48	10	9	55	12,5	5	2,4
	10-1420	2			100		32						80						3,3
	10-1430	3			132								112						4,3
	10-1440	4			164								144						5,4
10	10-1520	1			100	30	-	51	27	41	131	80	80	10	9	55	12,5	5	3,3
	10-1540	2			164		64						144						5,4
25	10-1610	1					67	42	-	67	42	56	208	125	0	57	9	97	14



FLUIDOTEHNIK


SERBIA

36210 VRNJACKA BANJA

Rudjinci 175/A

tel/fax: +381 - 36 - 631 - 710
631 - 711

E-mail: office@fluidoteknik.com

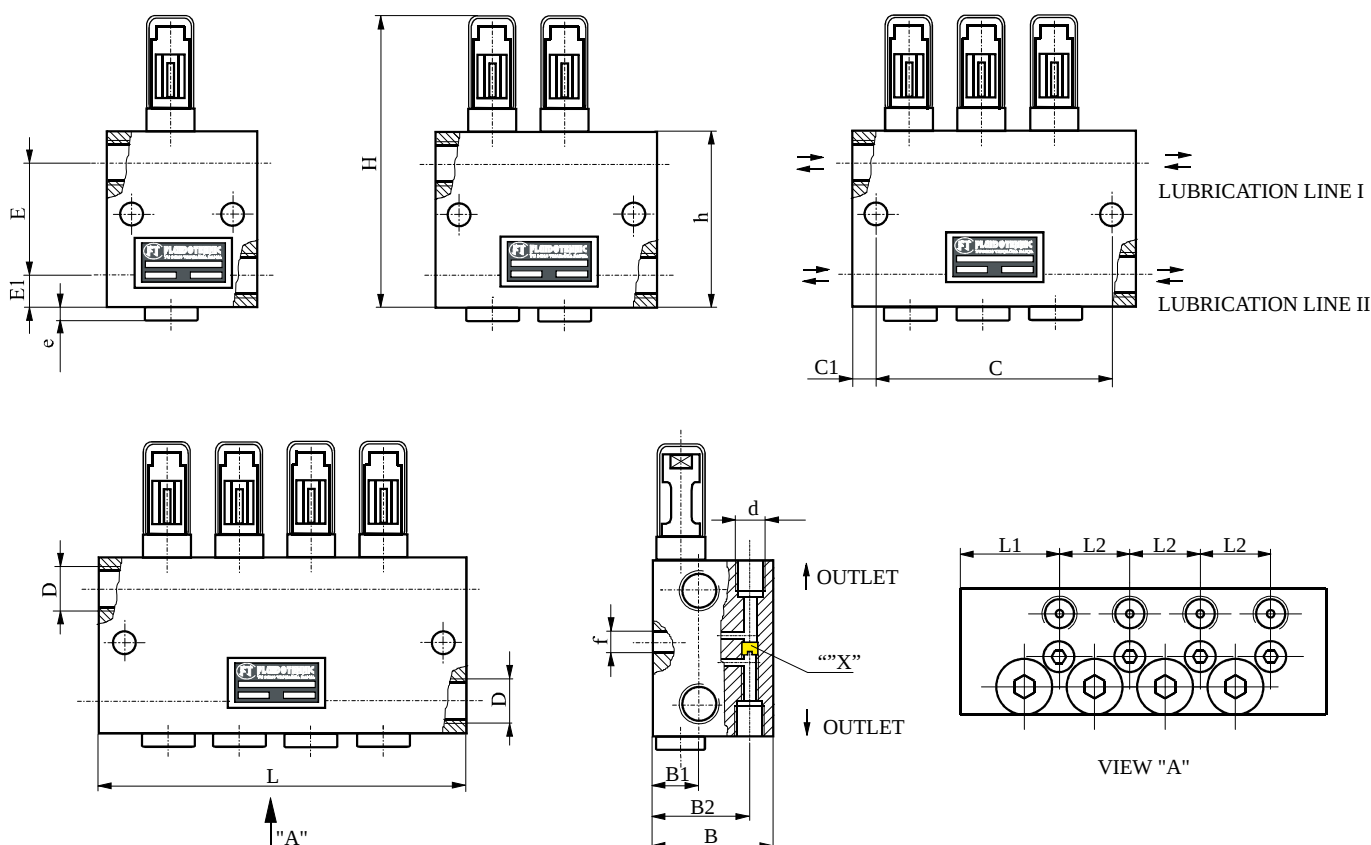

Size	Code	Number of lubricant points	D	d	L	L1	L2	B	B1	B2	H	h	C	C1	f	E	E1	e	Mass (kg)
2	10-1310-2	2	G 3/8"	G 1/4"	61	25	-	45	21	35	113	69	41	10	9	44	12,5	5	1,5
	10-1320-2	4			89		28						69						2,2
	10-1330-2	6			117								97						2,9
	10-1340-2	8			145								125						3,5
5	10-1410-2	2			68	30	-	51	27	41	131	80	48	10	9	55	12,5	5	2,4
	10-1420-2	4			100		32						80						3,3
	10-1430-2	6			132								112						4,3
	10-1440-2	8			164								144						5,4
10	10-1520-2	2			100	30	-	51	27	41	131	80	80	10	9	55	12,5	5	3,3
	10-1540-2	4			164		64						144						5,4
25	10-1610-2	2			67	42	-	67	42	56	208	125	0	57	9	97	14	13	4,5

TECHNICAL DATA

Size NV	2	5	10	25
oil viscosity	> 13 mm ² /s			
Lubricant greas.	NLGI < 3			
temperature	-30 ; + 80 °C			
Working pressure	10 - 400 bar			
Adjustment range	0,5 - 2 cm ³ /cycle	1,5 - 5 cm ³ /cycle	3,0 - 10 cm ³ /cycle	5,0 - 25 cm ³ /cycle



SERBIA
 36210 VRNJACKA BANJA
 Rudjinci 175/A
 tel/fax: +381 - 36 - 631 - 710
 631 - 711
 E-mail: office@fluidoteknik.com